


# JMR-9200/7200 series Marine Radar



\*The photograph includes options.

*- Provide high performance with high functions in a more user-friendly manner.*

- **Conforming to the latest IMO performance standards with Marine Equipment Directive (MED) certification.**
- **Ensuring intuitive and easy-to-use display and operation performance reflecting professional user's voices.**
- **A collision risk area display function "Safety Zone Viewer".**
- **Incorporating JRC original high-speed processor for great improvements in target detection performance.**
- **Delivered with a software license allowing an expansion tailored to each operational requirement for a wide variety of optional functions.**

# JMR-9200/7200 series

## Features

The JMR-9200/7200 series is a MED-certified marine radar incorporating a 26-inch-wide, 19-inch LCD and meeting the latest IMO performance standards. Incorporating a new Icon-based user interface to provide the latest functions in a user-friendly manner.



### Sophisticated user interface

The JMR-9200/7200 series incorporates a new user interface (named jGUI) for an intuitive, easy-to-use, simple menu system based on the display of icons. This interface always displays critical data in fixed positions on the screen while icon-based menu display informs users of corresponding functions straightaway. Furthermore, target tracking (TT) and AIS symbols feature a pop-up displays while mouseover on the target showing their main data at a glance.

### Easy-to-use operating unit



The newly designed trackball supports all the operation of the equipment. Users will be alerted with alarms from the operating unit and color changes under situations that require attention. The radar incorporates dedicated function buttons and control knobs similar to those of conventional models. Furthermore, the radar will be operable like conventional models by connecting an optional operating unit that incorporates a full keyboard.




### Safety Zone Viewer function

By displaying areas of high collision risk on the radar screen, navigators can intuitively grasp safe navigation areas. It is also effective in planning a course of avoidance in congested waters, as the safe course can be seen at a glance.


#### About the Safety Zone Viewer function

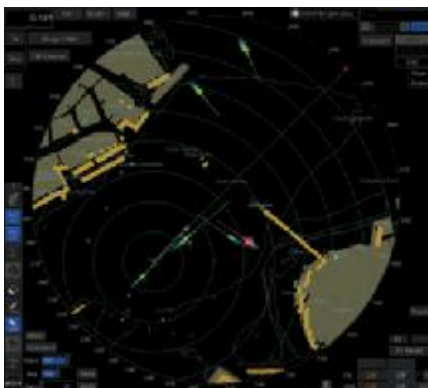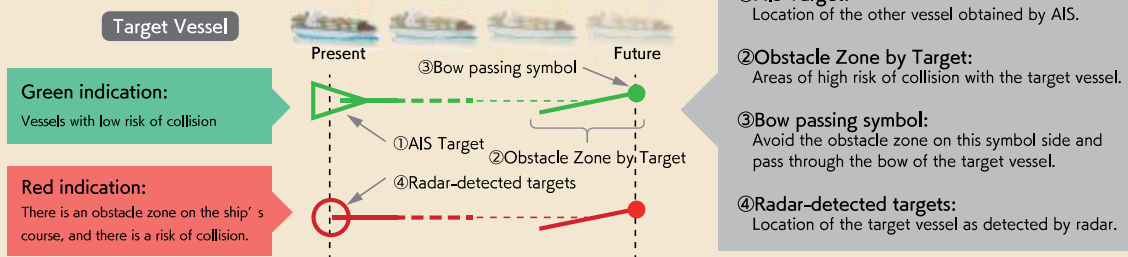

Safety Zone Viewer function Off

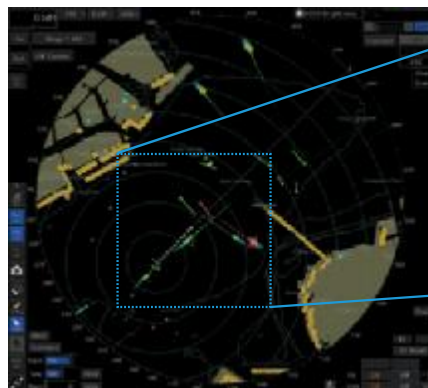

Safety Zone Viewer function On




Red areas are collision hazard areas where the risk of collision is high if you take the right of way  
Red areas are not displayed on the actual screen

# JMR-9200/7200 series Radar functions

## JRC's new processor brings advanced usability

The JMR-9200/7200 series incorporates JRC's newly developed high-speed processor. The outstanding processing capability has achieved optimum signal processing according to the distance from the own ship. This has greatly improved the target detection performance of the radar in short-distant sea clutter (reflection from the waves).

With the target tracking (TT) function of the radar operated in the background continuously, the movement vector of a target object and numerical information on the object can be displayed immediately after the user acquires the target. Furthermore, the JMR-9200 series with a 26-inch-wide screen makes it possible to use a second plan position indicator (PPI) in addition to the main PPI. While displaying two PPI's, it is possible to differentiate in range and off-center settings enabling the second PPI to expand a partial image around the own ship displayed in the main PPI and simultaneously monitor an area outside displayed on the main PPI.

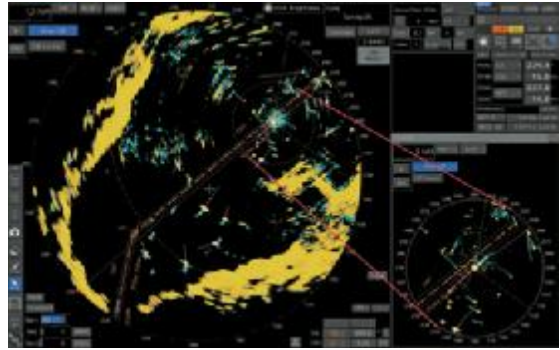


## Unique radar functions inherited

The JMR-9200/7200 series incorporates the unique features of JRC's radars that have been receiving a favorable reputation over the last decade.

## Constaview (Real-time head-up function)


The patented Constaview is realized through the use of two in-house built high-speed processors. All information gathered by the radar is fully processed within a few milliseconds before being displayed, generating a smooth image rotation. Even changing azimuth mode, the radar image is displayed without any delay caused by the scanner rotation.

### Constaview




**True Trails**  
Constaview refreshes the image every 16mS. Despite heading changes trails are always true.

### Conventional



**Relative Trails**  
Traditional technology relies on several sweeps of the scanner to redraw the image. Trails are presented as relative.

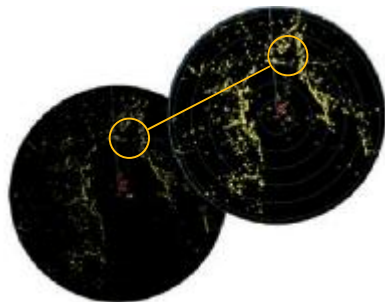

## TEF (Target enhancement function)

Developed exclusively by JRC, TEF allows target enhancement relative to the target size. TEF works by adding pixels to targets displayed on the radar image and allows a vastly improved degree of discrimination between targets. Sophisticated processing results in a proportional enhancement where the relative enhancement of smaller targets is greater than applied to larger targets.

## Solid-state scanner antenna

The JMR-9200/7200 series have been prepared X-band and S-band solid-state scanners. Each model incorporates a built-in performance monitor and has MED certification. A solid-state scanner antenna has the following advantages.

### No preheating or tuning required

No preheating or tuning is required. A stable image will be obtained promptly after the power is turned on.

### A built-in Doppler filter clearly extracts target objects

Conventional magnetron radars have difficulty in using Doppler filters. A new digital signal processing method has made improvements in target detection performance in clutters.

### Magnetron replacement unnecessary

The product adopted a highly reliable solid-state transmission circuit, thus eliminating periodical magnetron replacement and leading to a maintenance cost reduction.

# JMR-9200/7200 series

## Functional expansion and configuration

### Functional expansion

The equipment incorporates a variety of optional functions that will be available with software licenses added. Software licenses can be added before or after the radar comes into operation. Therefore, the radar can be customized to match the actual operating conditions.

#### Optional functions


- Chart radar function\*<sup>1</sup>
- Safety Zone Viewer function\*<sup>2</sup>
- Wave analysis function
- Expansion of AIS display targets (500 → 1000)

\*1. The chart radar function requires ENC cell permits as well as ECDIS.

\*2. Supported by software after by June 2022.



\*The photograph includes options.

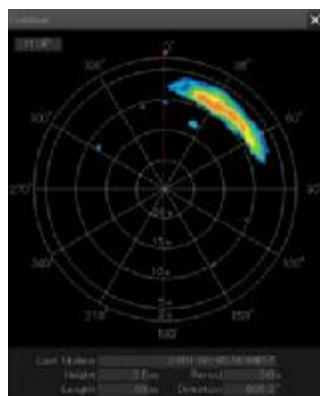


### Wave analysis supports safe and fuel-efficient voyages

Sea surface reflection signals obtained around the own ship by the X-band radar are analyzed to display wave height, wave direction, wavelength, and wave cycle information along with spectrum images\*<sup>3</sup>. The ship can take a course on the basis of information obtained from the wave analysis and suppress the pitching and rolling of the ship caused by waves, thus making it possible to ensure the safety of the crew members and cargo while saving the fuel consumption.

\*3. The spectrum image is available to JMR-9200 series only.

### VHF remote operation by radar

The radar offers a VHF remote operation function\*<sup>4</sup>. This can be used to configure channels on the VHF unit or to perform DSC calls using AIS targets on the radar PPI screen. Features such as the wireless speaker mic\*<sup>5</sup> make it possible to communicate with other ships even when away from the VHF equipment.

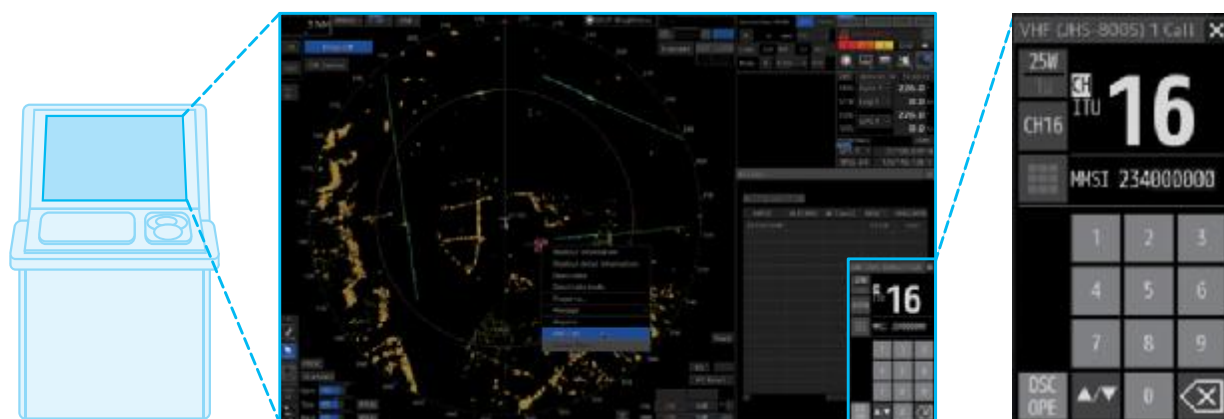

Example of radar JMR-9200 series 26-inch display

VHF screen

\*4. The VHF supports the JHS-800S.

\*5. Wireless speaker mic is option for the JHS-800S.

# JMR-9200/7200 series

## Functional expansion and configuration

### Satellite transmission blocking area display<sup>\*6</sup>

During communications between JRC INMARSAT FBB or INMARSAT GX<sup>\*7</sup> equipment and satellites, the JMR-9200/7200 series equipment can display satellite antenna reception levels, blocking conditions, and transmission suspension<sup>\*8</sup>.

\*6. Satellite transmission blocking area display is option, contact your JRC representative.

\*7. The INMARSAT FBB and INMARSAT GX support the JUE-251/501 and the JUE-60GX.

\*8. Transmission suspension supports only the JUE-60GX.



### Sensor data sharing

The Central Control Unit is provided with the minimum required external interfaces specified by Marine Equipment Directives (MEDs), and other sensor data is received through the bridge network (LAN) from the interface circuits. The interface circuits are designed to be shared by a number of new-type navigation devices, and each type of interface circuit can be combined and selected according to each signal format and the number of connections.




Interface circuit arrangement in NQE-1143 Junction Box

SLC	AOC	GIF	RIF
			✓
✓			✓
		✓	✓
✓	✓		✓
✓		✓	✓
✓	✓	✓	✓

Interface circuits in combination (Please refer to Block diagram)

### Block diagram

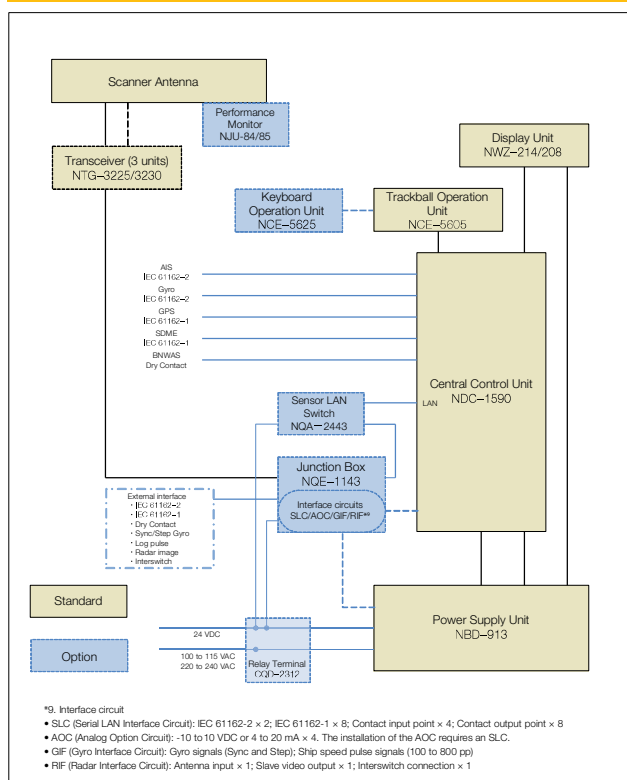

### In the box

- Central Control Unit
- Power Supply Unit
- Display Unit
- Trackball Operation Unit
- Scanner Antenna
- Transceiver (in the case of 3 units antenna)

### Options


- Keyboard Operation Unit
- Sensor LAN Switch
- Junction Box
- Serial LAN Interface Circuit
- Analog Option Circuit
- Gyro Interface Circuits
- Radar Interface Circuit
- Relay Terminal Block
- Display Unit Mount Kit
- Performance Monitor (applicable to some scanner antennas)
- Interswitch (4 ch/8 ch)

# JMR-9200/7200 series

## Dimensions and weight


### 19-inch Display and Desktop Frame

**NWZ-214** Weight: 4.6 kg    **CWB-1594\*1** Weight: 3.6 kg

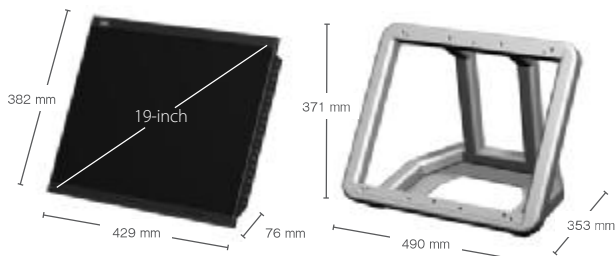

### 26-inch Display and Desktop Frame

**NWZ-208** Weight: 16 kg    **CWB-1595\*1** Weight: 5.5 kg

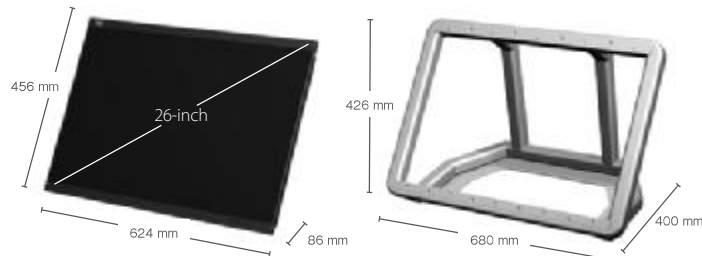

### Central Control Unit

**NDC-1590** Weight: 5.6 kg



### Power Supply Unit

**NBD-913** Weight: 4.2 kg




### Trackball Operation Unit

**NCE-5605** Weight: 1.3 kg




### Keyboard Operation Unit

**NCE-5625\*1** Weight: 0.8 kg

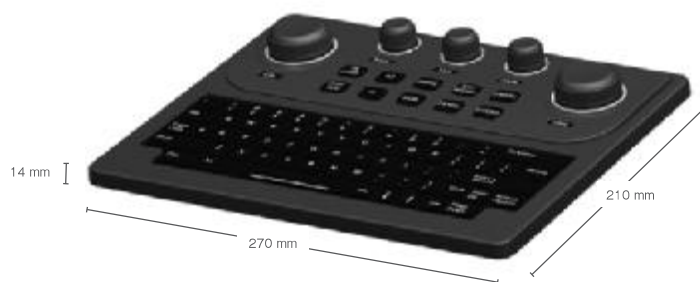


### Junction Box

**NQE-1143\*1** Weight: 3.8 kg

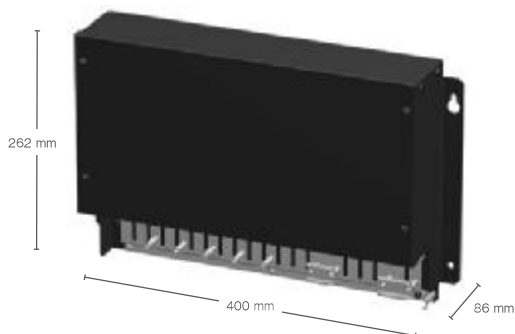

### 19-inch Cradle Frame and 26-inch Cradle Frame


**CWA-245\*1** Weight: 55 kg    **CWB-246\*1** Weight: 65 kg

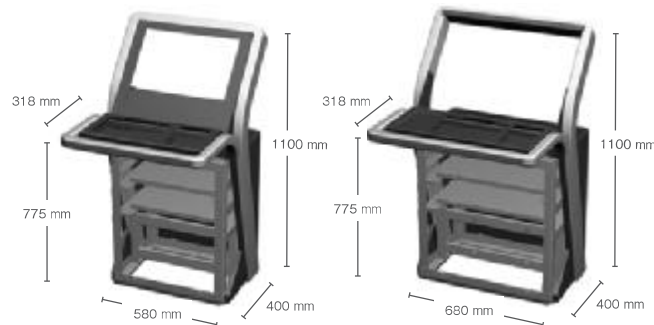

\*1. Option. \*2. The performance monitor is option. \*3. The transceiver NTG-3225 is required.

**10 kW 6 ft X-band Scanner Antenna (2 units)**

**NKE-2103-6<sup>2</sup> (27 rpm)/NKE-2103-6HS<sup>2</sup> (48 rpm)** Weight: 40 kg  
Swing circle: 1910 mm



**25 kW 6 ft X-band Scanner Antenna (2 units)**

**NKE-1125-6<sup>2</sup> (24 rpm)/NKE-2254-6HS<sup>2</sup> (48 rpm)** Weight: 55 kg  
Swing circle: 1910 mm



**25 kW 9 ft X-band Scanner Antenna (2 units)**

**NKE-1125-9<sup>2</sup> (24 rpm)** Weight: 60 kg  
Swing circle: 2825 mm




**25 kW 7 ft X-band Scanner Antenna (3 units<sup>\*3</sup>)**

**NKE-1129-7<sup>2</sup> (24 rpm)** Weight: 51 kg  
Swing circle: 2270 mm



**25 kW 9 ft X-band Scanner Antenna (3 units<sup>\*3</sup>)**

**NKE-1129-9<sup>2</sup> (24 rpm)** Weight: 53 kg  
Swing circle: 2825 mm

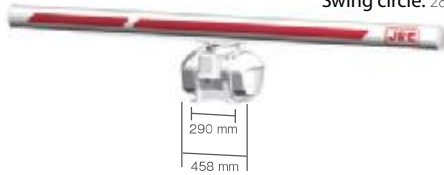

**30 kW 12 ft S-band Scanner Antenna (2 units)**

**NKE-1130<sup>2</sup> (24 rpm)** Weight: 180 kg  
Swing circle: 4000 mm




**30 kW 12 ft S-band Scanner Antenna (3 units<sup>\*3</sup>)**

**NKE-1139<sup>2</sup> (24 rpm)** Weight: 165 kg  
Swing circle: 4000 mm




**600 W 6 ft X-band Solid-state Scanner Antenna (2 units)**

**NKE-1696-6 (24 rpm)** Weight: 53 kg  
Swing circle: 1880 mm



**600 W 9 ft X-band Solid-state Scanner Antenna (2 units)**

**NKE-1696-9 (24 rpm)** Weight: 58 kg  
Swing circle: 2810 mm

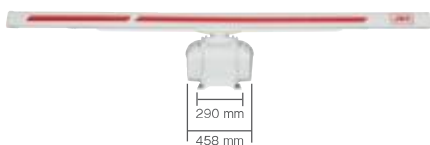

**250 W 8 ft S-band Solid-state Scanner Antenna (2 units)**

**NKE-2632 (24 rpm)** Weight: 85 kg  
Swing circle: 2770 mm



**250 W 8 ft S-band Solid-state Scanner Antenna (2 units)**

**NKE-2632-H (48 rpm)** Weight: 90 kg  
Swing circle: 2270 mm



**250 W 12 ft S-band Solid-state Scanner Antenna (2 units)**

**NKE-1632 (24 rpm)** Weight: 160 kg  
Swing circle: 4000 mm



# JMR-9200/7200 series

## Specifications

Model	26-inch type*1	JMR-9210-6X JMR-9210-6XH	JMR-9225-6X JMR-9225-9X	JMR-9225-6XH	JMR-9225-7X3 JMR-9225-9X3	JMR-9230-S	JMR-9230-S3	JMR-9282-S JMR-9282-SH	JMR-9272-S	JMR-9296-6X	JMR-9296-9X
	19-inch type*1	JMR-7210-6X JMR-7210-6XH	JMR-7225-6X JMR-7225-9X	JMR-7225-6XH	JMR-7225-7X3 JMR-7225-9X3	JMR-7230-S	JMR-7230-S3	JMR-7282-S JMR-7282-SH	JMR-7272-S	JMR-7296-6X	JMR-7296-9X
Conforming to IMO standards	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Unit configuration	2 unit configuration			3 unit configuration*2	2 unit configuration	3 unit configuration*3	2 unit configuration		2 unit configuration		
Performance Monitor	NJU-85					NJU-84		Built-in		Built-in	
Frequency	X-band					S-band					
Display	Color raster scan PPI										
<b>Scanners</b>											
Model*1	NKE-2103-6 NKE-2103-6HS	NKE-1125-6 NKE-1125-9	NKE-2254-6HS	NKE-1129-7 NKE-1129-9	NKE-1130	NKE-1139	NKE-2632 NKE-2632-H	NKE-1632	NKE-1696-6	NKE-1696-9	
Antenna length	6 feet	6/9 feet	6 feet	7/9 feet	12 feet		8 feet	12 feet	6 feet	9 feet	
Transmission output	10 kW		25 kW		30 kW		250 W (solidification)		600 W (solidification)		
Transmission frequency	9410 MHz ± 30 MHz				3050 MHz ± 20 MHz		PON: 3035 MHz QON: 3065±4 MHz or 3060±4 MHz		PON: 9410 MHz QON: 9440±4 MHz or 9435±4 MHz		
Horizontal beam width	1.2°	6 feet: 1.2° 9 feet: 0.8°	1.2°	7 feet: 1.0° 9 feet: 0.8°	1.9°		2.7°	1.9°	1.2°	0.8°	
Vertical beam width	20°			25°		25°		20°			
Rotational speed	27 rpm 48 rpm (high-speed rotation)	24 rpm	48 rpm (high-speed rotation)	24 rpm	24 rpm		24 rpm 48 rpm (high-speed rotation)	24 rpm	24 rpm		
Pulse width/Frequency*4	0.08 μs/2250 Hz		0.07 μs/2250 Hz, 0.2 μs/2250 Hz				0.07 μs/(4.6 μs, 8 MHz)/1860 Hz or 2280 Hz		0.07 μs/(4.6 μs, 8 MHz)/1360 Hz or 1700 Hz		
	0.25 μs/1700 Hz		0.3 μs/1900 Hz, 0.4 μs/1400 Hz				0.14 μs/(9.1 μs, 8 MHz)/1860 Hz or 2280 Hz		0.14 μs/(4.6 μs, 8 MHz)/1360 Hz or 1700 Hz		
	0.5 μs/1200 Hz		0.8 μs/750 Hz				0.29 μs/(9.1 μs, 8 MHz)/1860 Hz or 2280 Hz		0.28 μs/(9.1 μs, 8 MHz)/1000 Hz		
	0.8 μs/750 Hz		1.0 μs/650 Hz				0.57 μs/(9.1 μs, 8 MHz)/1280 Hz		0.56 μs/(9.1 μs, 8 MHz)/1000 Hz		
	1.0 μs/650 Hz		1.2 μs/510 Hz				1.14 μs/(18.3 μs, 8 MHz)/640 Hz		1.12 μs/(9.1 μs, 9 MHz)/660 Hz or 730 Hz		
Duplexer	Circulator + Diode limiter					Circulator + TRHPL		Circulator + Diode limiter		Circulator + Diode limiter	
Range scale	0.125, 0.25, 0.5, 0.75, 1.5, 3, 6, 12, 24, 48, 96 NM										
Motor	Brushless										
Tuning	Auto/Manual										
Ambient conditions	Temperature: -25 °C to +55 °C (NTG-3225/NTG-3230: -15 °C to +55 °C); Relative humidity: 93 % @40 °C										
<b>Display Unit</b>											
LCD	JMR-9200: 26-inch WUXGA color LCD, 1920 × 1200 dots JMR-7200: 19-inch SXGA color LCD, 1280 × 1024 dots										
PPI effective diameter	JMR-9200: 320 mm min. JMR-7200: 250 mm min.										
Azimuth display mode	North up, course up, and head up										
Operation mode	Relative motion - True trails; Relative motion - Relative rails; True movement - True rails										
EBL	Two (EBL1/EBL2), (Center/Independent), 000.0 to 359.9°, Four-digit display										
VRM	Two (VRM1/VRM2), 0.000 to 96.0 NM, Four-digit display										
Sea surface/Rain and snow reflection suppression	Auto/Manual										
Trail display	Short (off, 15 s to 60 mins.)/Long (off, 30 mins to 24 hrs.), Two modes										
Own ship trail records	24 hours										
User map	100,000 points										
Off-center	66 % of the radius (excluding 96 NM range)										
Number of TT tracking targets	100 max.										
TT tracking range	Auto/Manual 32 NM max.										
Number of AIS targets	500 targets max. (expanding to a maximum 1,000 targets with an optional function added)										
TT/AIS vector	True/Relative, variable from 1 to 120 minutes										
Ambient conditions	Operating temperature: -15 °C to +55 °C; Relative humidity: 93 % @40 °C										
Power supply voltage	100 to 115 VAC, 50/60 Hz, 1 φ/220 to 240 VAC, 50/60 Hz, 1 φ/24 VDC										
<b>Option</b>											
Chart radar function	Software license										
Expansion of number of AIS display targets	Software license										
Wave analysis function	Software license										
Keyboard Operation Unit	NCE-5625										
Junction Box	NQE-1143										
Interface Circuits	CMH-2370 (Serial LAN Interface Circuit) / CMJ-560 (Analog Option Circuit) / CMJ-554 (Gyro Interface Circuit)										
Self-stand Frame	CWA-245 (19-inch) / CWA-246 (26-inch)										
Power Control Unit	NQE-3167										
Interswitch	NQE-3141-4A (box, up to 4 units)										
Interswitch	NQE-3141-8A (box, up to 8 units)										
Anti-icing Antenna*5	None	NKE-1125-6D/9D	NKE-2254-6HSD	NKE-1129-7D/9D	NKE-1130D	NKE-1139D	NKE-2632D/E	NKE-1632D/E	NKE-1696D/E		

\*1. Each model with the model number suffix "H" is a high-speed rotation model.

\*2. External transceiver: NTG-3225

\*3. External transceiver: NTG-3230

\*4. The NKE-2632/1632/1696 scanner antennas: Transmission pulse width (1st)/(Transmission pulse width and frequency shift width (2nd))/Repetition frequency

\*5. The supply voltage of each model is shown by the suffix. D: 100 VAC and E: 220 VAC

• Specifications may be subject to change without notice.

For further information, contact:



**Japan Radio Co., Ltd.**

Since 1915

URL <https://www.jrc.co.jp/eng/>

**Tatsumi Office:** 7-32, Tatsumi 1-chome, Koto-ku, Tokyo 135-0053, Japan  
Telephone: +81-3-5534-1207  
Facsimile: +81-3-5534-1199

**Overseas Branches:** Athens, Manila  
**Liaison Offices:** Taipei, Hanoi, New York  
**Overseas Subsidiaries:** Busan, Shanghai, Singapore  
Jakarta, Rotterdam, Egersund  
Houston, Rio de Janeiro

36EM

ISO9001, ISO14001 Certified